

Filling machines Series PD




Design SL

with suction pipe
for liquid products



Design MV

with membrane valve
for inline cleaning application
or for abrasive products

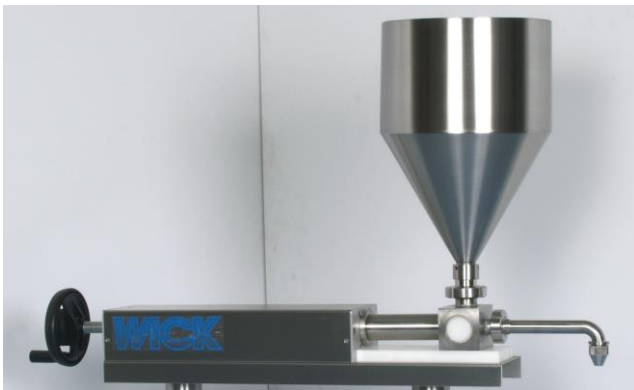

Design TR

with hopper for pasty products

Optionals:

conical cock valve
Electric heated hopper
Stirrer for the hopper

Number of filling stations:

Product contacting parts:

Sealing rings:

Drive:

Output:

1-4

stainless steel 1.4571 or plastics

Perbunan, Viton or PTFE

compr. air, 6 bar

up to 20 strokes/min

Filling ranges:

PD 2 0,2ml-2ml

PD 10 1,0ml-10ml

PD 25 2,5ml-25ml

PD 50 5,0ml-50ml

PD 100 10,0ml-100ml

PD 250 25ml-250ml

PD 500 50ml-500ml

PD 1000 100ml-1000ml


PD 2500 250ml-2500ml

PD 5000 500ml-5000ml

Example: PD SL-Version
with machine table mounted on wheels



Example: PD SL-Version with product
contacting parts fully made of plastics

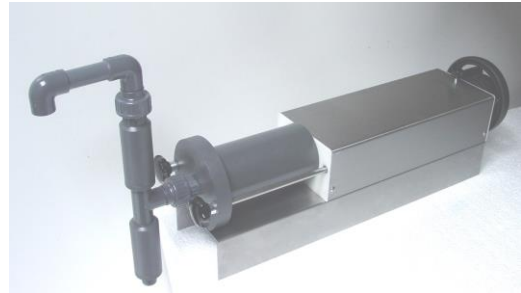

Example: PD SL-Version mounted to an automatic filling and closing machine
Minican

